


## 23430 DUN 6,5W T SMD E14-WW

LED light source

5905339234308



The small-size Kanlux DUN is a “candle-type” bulb with E14 screw. Durability of these light sources results from the combination of LED SMD diodes and ceramic housing. Kanlux DUN are characterised by high luminous efficiency. They are perfect for wall lamps and chandeliers in all places where we want to get a lot of light even though its source is small.

### TYPE OF LIGHT SOURCE:

**Lighting technology used:** LED

**Non-directional or directional light source:** NDLS

**Mains or non-mains light source:** MLS

**Connected light source (CLS):** no

**Colour-tunable light source:** no

**High luminance light source:** no

**Anti-glare shield:** no

**Dimmable:** no

### PRODUCT PARAMETERS:

**Colour:** white

**Compatible with a dimmer:** no

**Diameter [mm]:** 37

**Mercury content:** no

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50/60

**Lamp rated current [mA]:** 54

**Rated power [W]:** 6.5

**Material:** plastic

**Light source:** C37

**Diode type:** LED SMD

**Colour temperature:** Warm white

**Cap:** E14

**Rated lamp-service life [h]:** 20000

**Number of on/off cycles:**  $\geq 15000$

**Light source shape:** swieczka

### GENERAL PRODUCT PARAMETERS:

**Energy consumption in on-mode (kWh/1000h):** 7

**Energy efficiency class:** F

**Useful luminous flux  $\Phi_{use}$  [lm]:** 600

**Useful luminous flux  $\Phi_{use}$  [lm]:** in sphere (360°)

**Correlated colour temperature [K]:** 3000

**On-mode power  $P_{on}$  [W]:** 6.5


**Height [mm]:** 107

**Width [mm]:** 37

**Depth [mm]:** 37

## 23430 DUN 6,5W T SMD E14-WW

LED light source

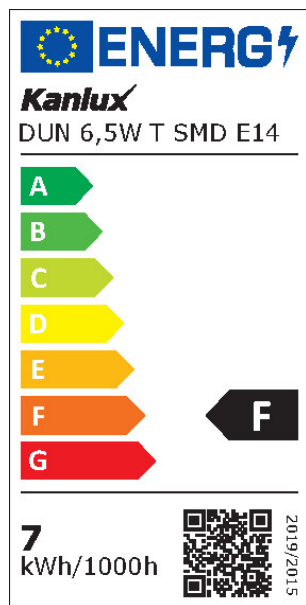

**Colour rendering index:** 80  
**Chromaticity coordinates (x):** 0.44  
**Chromaticity coordinates (y):** 0.403  
**Claim of equivalent power [W]:** 47

### PARAMETERS FOR LED AND OLED LIGHT SOURCES:


**R9 colour rendering index value:** 3  
**Survival factor:**  $\geq 0.9$   
**The lumen maintenance factor:** 0.95

### PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

**Displacement factor ( $\cos \phi 1$ ):** 0.5  
**Colour consistency in McAdam ellipses:**  $\leq 6$   
**LED light source replaces a fluorescent light source without integrated ballast of a particular wattage:** Not applicable  
**Flicker metric (Pst LM):**  $\leq 1,0$   
**Stroboscopic effect metric (SVM):**  $\leq 0,4$

### LOGISTIC DATA:

**Unit of measurement:** unit  
**Packaging method:** 100  
**Number of units in the secondary packaging:** 1  
**Number of units in the packaging:** 100  
**Net unit weight [g]:** 46  
**Grammage [g]:** 60.3  
**Length of a unit pack [cm]:** 4  
**Width of a unit pack [cm]:** 4  
**Height of a unit pack [cm]:** 11  
**Weight of a cardboard box [kg]:** 6.03  
**Width of a cardboard box [cm]:** 23  
**Height of a cardboard box [cm]:** 25  
**Length of a cardboard box [cm]:** 42  
**Volume of a cardboard box [m<sup>3</sup>]:** 0.02415

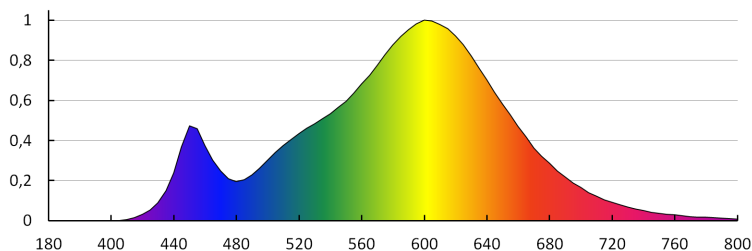

## 23430 DUN 6,5W T SMD E14-WW

LED light source

KANLUX S.A. (kat 23430) DUN 6,5W T SMD E14-WW / Krzywa rozsyłu światła  
(biegunowo)

Oprawa: KANLUX S.A. (kat 23430) DUN 6,5W T SMD E14-WW  
Lampy: 1 x DUN 6,5W T SMD E14-WW

