


WLD PLANK CCT

WLD+20010

LED luminaire WLD PLANK CCT with the possibility of changing the light color (CCT), with a power of 20/30/40 W, high light efficacy 109 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 2700/4000/6000K, we can adjust the light color depending on our needs and preferences. It is made of high-quality components, supported by a 5-year warranty. It also stands out for its very high colour rendering index RA>90. Narrow beam angle 40° gives directional light so that selected objects or surfaces can be better exposed. Suitable for both surface and suspended mounting. Surface and pendant mounting is possible using dedicated mounting accessories (sold separately: ACC+WLD20009_ZAWIESIA - suspended mounting, ACC+WLD20009_ZACZEPLY - surface mounting).

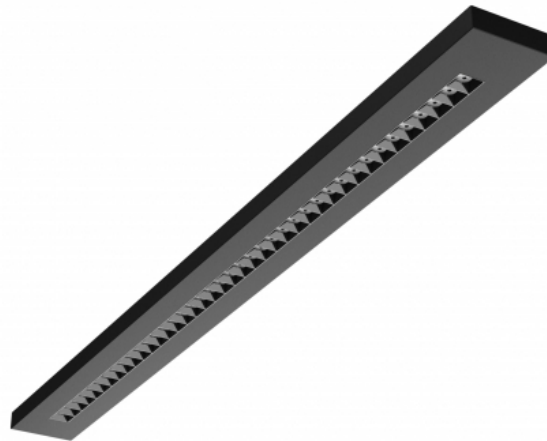

Power	20/30/40 W	Voltage	230 V
Colour temperature	2700/4000/6000 K	Colour of light	CCT
Beam angle	40 °	Degree of protection (IP)	IP20

Technical data


Code	WLD+20010
Power	20/30/40 W
Nominal current	185 mA
Voltage	230 V
Energy consumption	40 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.95
Useful luminous flux*	4350 lm (360°)
Luminous flux**	1500/2250/3000 lm (360°)
Lamp efficacy	109 lm/W
Luminous intensity	5900 cd
Colour temperature	2700/4000/6000 K
Colour of light	CCT
Beam angle	40 °
RA	90
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum
Degree of protection (IP)	IP20
Colour	Black
Dimension (AxBxC)	1200x100x25 mm
For use	Inside
Assembly method	On the ceiling, Suspended
Application	Inside
Made in	PRC
Other	Light color change function 2700K/4000K/6000K ,

Logistics data


Bulk packaging	10 pcs.
Quantity per pallet	100 pcs.
Gross weight (1 pcs.)	1.85 kg

Related documents



 User manual



 Declaration of Conformity



 Photometric file

