


Track light projector

5905339331311



Kanlux ACORD ATL 1 are integrated lighting fixtures to be mounted on three-phase track. These are lamps that can be adapted to our individual needs. We can choose white or black, two powers (18W and 30W), light color and lighting angle (standard is 60°, but we can replace the reflector and change the angle to 15° or 36°) depending on whether we want to illuminate the surface or a specific detail. Kanlux ACORD ATL 1 stands for 50 000 hours of durability and a 5-year warranty. Branded key components (LED COB and power supply), high level of real color rendering (CRI > 90) and elimination of glare (UGR < 19) are other advantages of these unique luminaires.

#### GENERAL DATA:

**Colour:** black  
**Place of assembly:** rail TEAR  
**Place of application:** Indoors  
**Minimum distance from the illuminated object:** 0,5m  
**Compatible with a dimmer:** no  
**Integrated LED light source:** yes

#### TECHNICAL DATA:

**Rated voltage [V]:** 220-240 AC  
**Rated frequency [Hz]:** 50  
**Maximum power [W]:** 18  
**Class of protection against electric shock:** II  
**Diode type:** LED COB  
**Luminous flux [lm]:** 1700  
**Colour temperature:** Warm white  
**Correlated colour temperature [K]:** 3000  
**Colour consistency in McAdam ellipses:** ≤6  
**Colour rendering index:** 90  
**Service life [h]:** 50000  
**Number of on/off cycles:** ≥30000  
**Lighting angle [°]:** 60  
**Luminous efficiency of the lamp [lm/W]:** 94  
**Ambient temperature range to which the product can be exposed:** 5÷25  
**Enclosure material:** aluminum alloy  
**Protective glass material:** plastic  
**Lamp-heating time [s]:** ≤1  
**Lamp-ignition time [s]:** ≤0,5  
**The fixture is movable horizontally [°]:** 315  
**The fixture is movable vertically [°]:** 90  
**IP class:** 20

### Track light projector




#### LOGISTIC DATA:

**Unit of measurement:** unit  
**Packaging method:** 20  
**Number of units in the secondary packaging:** 1  
**Number of units in the packaging:** 20  
**Net unit weight [g]:** 530  
**Grammage [g]:** 655  
**Length of a unit pack [cm]:** 20  
**Width of a unit pack [cm]:** 8  
**Height of a unit pack [cm]:** 16.5  
**Weight of a cardboard box [kg]:** 13.1  
**Width of a cardboard box [cm]:** 43  
**Height of a cardboard box [cm]:** 35.5  
**Length of a cardboard box [cm]:** 43  
**Volume of a cardboard box [m<sup>3</sup>]:** 0.06564


#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- for installation on the TEAR N busbar

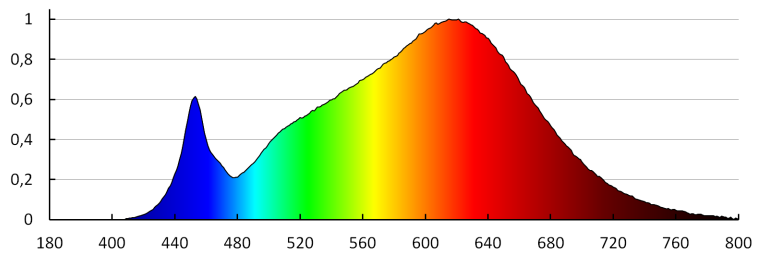

KANLUX S.A. (kat 33131) ATL1 18W-930-S6-B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33131) ATL1 18W-930-S6-B  
Lamps: 1 x ATL1 18W-930-S6

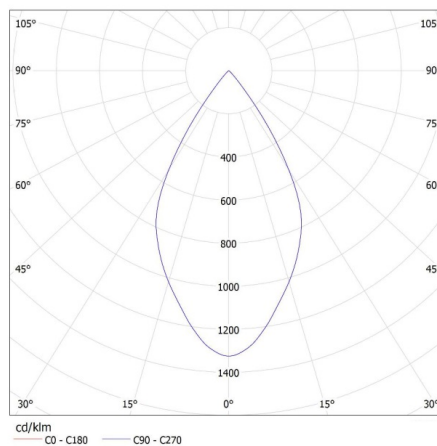


## 33131 ATL1 18W-930-S6-B

Track light projector


KANLUX S.A. (kat 33131+33140) ATL1 18W-930-S6-B + 33140 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33131+33140) ATL1 18W-930-S6-B + 33140  
Lamps: 1 x ATL1 18W-930-S6

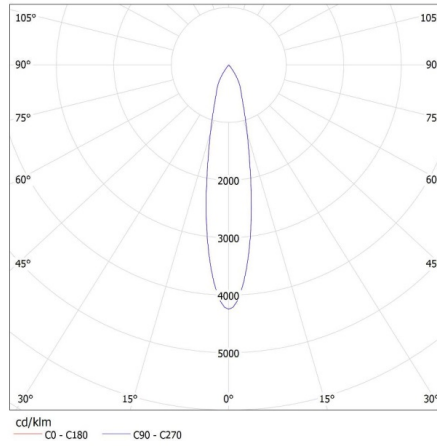

KANLUX S.A. (kat 33131+33141) ATL1 18W-930-S6-B + 33141 / LDC (Polar)

Luminaire: KANLUX S.A. (kat 33131+33141) ATL1 18W-930-S6-B + 33141  
Lamps: 1 x ATL1 18W-930-S6

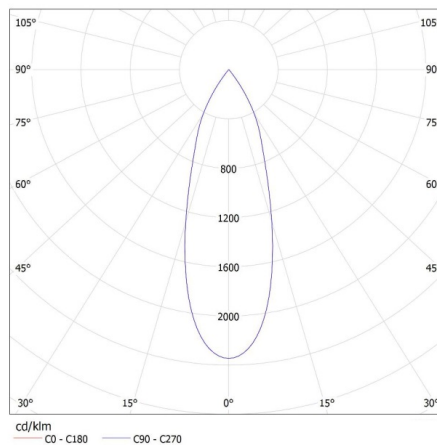

## 33131 ATL1 18W-930-S6-B

Track light projector

### ACCESSORIES:

**33140** REF ATL1-18W-S15 Reflector for the ATL 1 luminaire, 18 W, 15 degrees



**33141** REF ATL1-18W-S36 Reflector for the ATL 1 luminaire, 18 W, 36 degrees



**33142** REF ATL1-30W-S15 Reflector for the ATL 1 luminaire, 30 W, 15 degrees



**33143** REF ATL1-30W-S36 Reflector for the ATL 1 luminaire, 30 W, 36 degrees

