

# LUNARIX 1

SLIP007016

LED luminaire LUNARIX 1 with the possibility of changing the light color (CCT), with a power of 2 W, high light efficacy 100 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 2700/4000/6500K, we can adjust the light color depending on our needs and preferences. The luminaire has lenses on both sides, so it shines up and down. It has a high IP54 rating, making it ideal for use in rooms with high humidity. It also stands out for its very high colour rendering index RA>90. Narrow beam angle 45° gives directional light so that selected objects or surfaces can be better exposed. Designed for surface mounting.

CCT

CRI  
>90

IP54




Power	<b>2 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>200 lm (360°)</b>	Colour temperature	<b>2700/4000/6500 K</b>
Colour of light	<b>CCT</b>	Beam angle	<b>45 °</b>
Degree of protection (IP)	<b>IP54</b>		

## Technical data

Code	SLIP007016
Power	2 W
Nominal current	20 mA
Voltage	230 V
Energy consumption	2 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Useful luminous flux*	200 lm (360°)
Luminous flux**	150 lm (360°)
Lamp efficacy	100 lm/W
Luminous intensity	220 cd
Colour temperature	2700/4000/6500 K
Colour of light	CCT
Beam angle	45 °
RA	>90
Light source included	Yes
Uniformity of color SDCM max	5
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	POLIWĘGLAN
Degree of protection (IP)	IP54
Colour	White
Dimension (AxBxC)	110x100x40 mm
For use	Outside/Inside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC


## Logistics data

Bulk packaging	40 pcs.
Quantity per pallet	1600 pcs.
Gross weight (1 pcs.)	0.21 kg

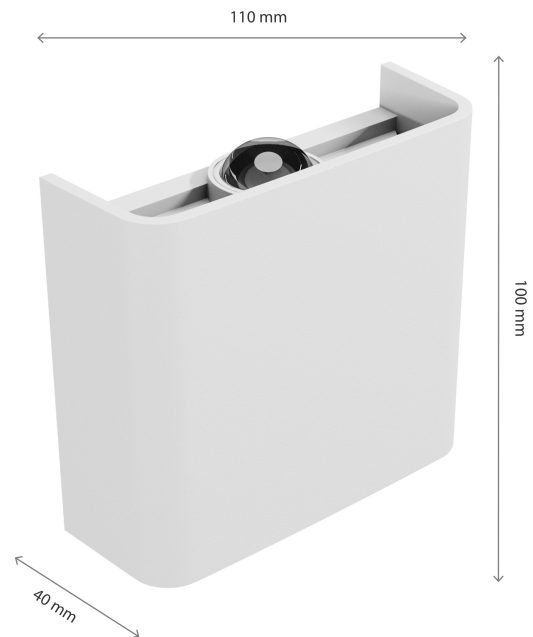


## Related documents



 User manual



 Declaration of Conformity



 Photometric file

